

## Specification of 2CR5

High Power Cylindrical Crimp-sealed  
Primary Lithium Battery


Nominal Capacity * <sup>1</sup>		1400 mAh
Nominal Voltage		6 V
Standard Discharge Current		10 mA
Max. Discharge Current	Continuous * <sup>2</sup>	1500 mA
	Pulse * <sup>3</sup>	3500 mA
Temperature Range		-40°C ~ +60°C
Weight		40 g
Dimensions	Length (L)	34 mm
	Width (W)	17 mm
	Height (H)	45 mm

\*1 Nominal capacity is determined to an end voltage of 4,0V when the battery is allowed to discharge at a standard current level at 23°C.

\*2 Current value is determined so that 50% of the nominal capacity is obtained with an end voltage of 4,0V at 23°C.

\*3 Current value for obtaining 2,0V cell voltage when 15 sec. pulse applied at 50% discharge depth (23°C).

### Dimensions

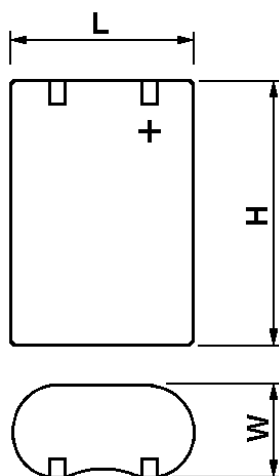

Size with case:

L = 34,0<sub>-0,3</sub>

W = 17,0<sub>-0,2</sub>

H = 45,0<sub>-0,3</sub>

(unit: mm)